



e@syDrive® 4425

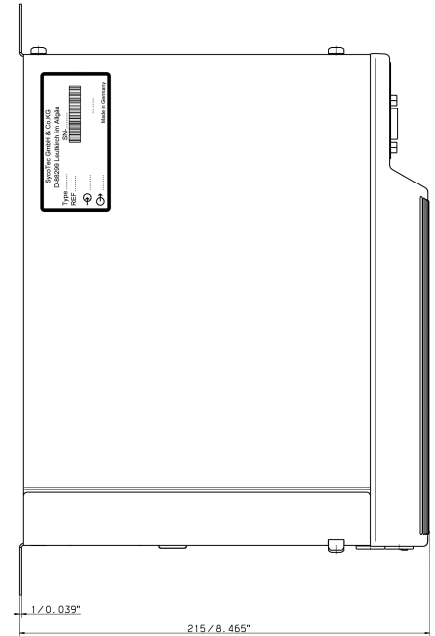

Bestell-Nr. / Part No. 1001 2768

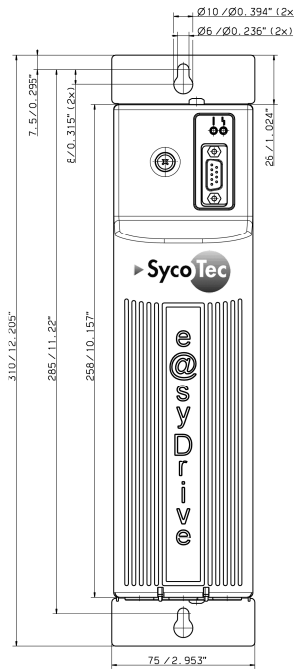

Spannungsversorgung Input voltage	70 V DC / max. 50 V AC
Ausgangsspannung Output voltage	3 x 0 - 45 V AC
Ausgangsstrom Output current	8 A (max. 12 A)
Nennausgangsleistung Rated output power	350 VA
Ausgangsfrequenz Output frequency	max. 4.000 Hz
Modulationsart Modulation	Puls-Amplituden-Modulation (PAM)
Bremswiderstand (intern) Brake resistor (internal)	60 W

Versorgungsmodul Power supply	e@syDrive® 4428
Spindelempfehlung DC Spindle reference DC	4015, 4015 DC-G, 4015 DC-M, 4015 DC-R, 4025 DC-S, 4025 DC-T, 4033
Spindelempfehlung AC Spindle reference AC	4010, 4025, 4026, 4029, 4033, 4052
Umgebungstemperatur Ambient temperature	0 - 50 °C
Schutzart Protection category	IP 20
EMV EMC	EN 61800-3
Gewicht Weight	4,0 kg

Inbetriebnahme	<ul style="list-style-type: none"> • via Notebook (RS232)
Schnittstellen	<ul style="list-style-type: none"> • 2 x Relaisausgang • 1 x Frequenzausgang • 6 x Digital-Eingang • 1 x Analog-Eingang

Commissioning	<ul style="list-style-type: none"> • via Notebook (RS232)
Interfaces	<ul style="list-style-type: none"> • 2 x Relay output • 1 x Frequency output • 6 x Digital input • 1 x Analog input

Änderungen vorbehalten / Subject to change without notice